

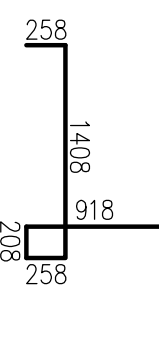
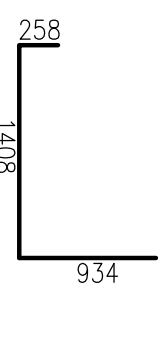

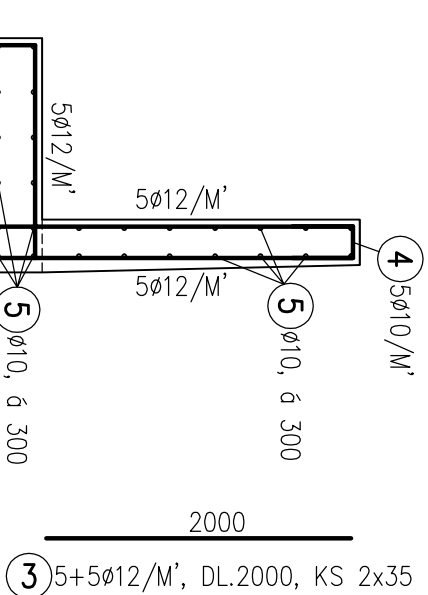








VÝZTUŽ ŘEZU 1-1 – 6,8 M’



VÝZTUŽ ŘEZU 2-2 – 7 M’

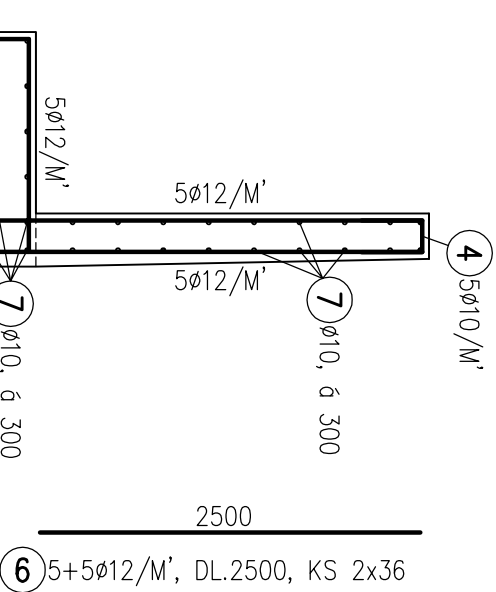

VÝZTUŽ ŘEZU 3-3 – 9,2 M’

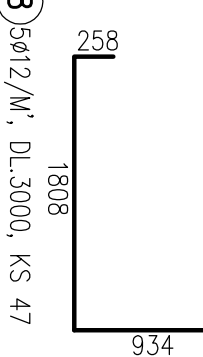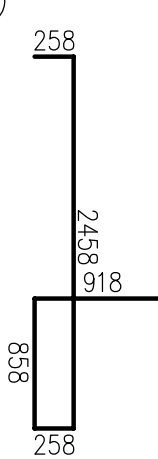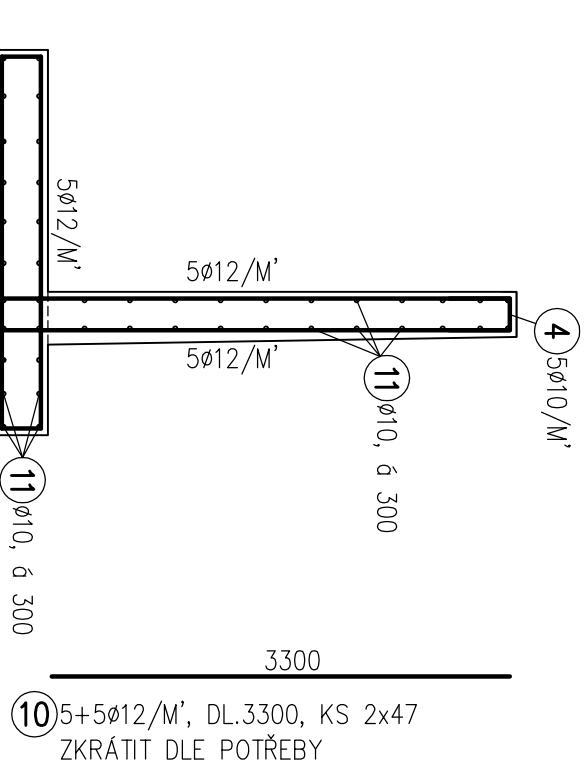

VÝPIS VÝZTUŽE					
OCEL BST500					
POL	PROFIL	DL.	KS	10	12
1	12	3.05	71		216.55
2	12	2.60	71		184.60
3	12	2.00	70		140.00
4	10	1.05	118	123.90	
5	10	6.70	26	174.20	
6	12	2.50	72		180.00
7	10	6.90	30	207.00	
8	12	3.00	47		141.00
9	12	4.75	47		223.25
10	12	3.30	94		310.20
11	10	9.15	46	420.90	
CELKOVÁ DÉLKA (M)				926.00	1395.60
HMOTNOST 1m' (KG)				0.616	0.887
CELKOVÁ HMOTNOST (KG)				570.6	1238.4
SPOTŘEBA CELKEM (KG)					1810 KG

BETON C30/37 XC4, XF1  
OCEL BST500  
KRYTÍ 40 MM

VÝZTUŽ OPĚRNÉ STĚNY OZ 01  
ŘEZ 1-1, ŘEZ 2-2, ŘEZ 3-3  
M 1:50  
Č.V. D1.2.3/7  
DOSTAVBA MŠ ZA FONTÁNOU V PŘELOUČI