



VÝZTUŽ ŘEZU 4-4 – 12 M’

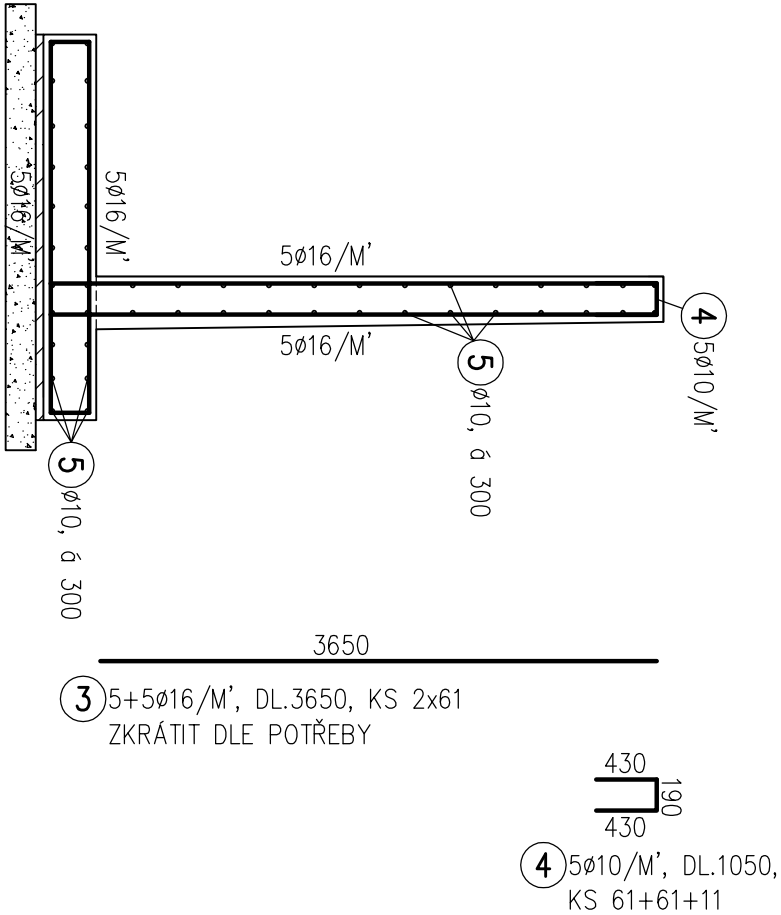

4 5ø10/M', DL.1050, KS 61+61+11

3 5+5ø16/M', DL.3650, KS 2x61 ZKRÁTIT DLE POTŘEBY


VÝZTUŽ ŘEZU 5-5 – 12 M’

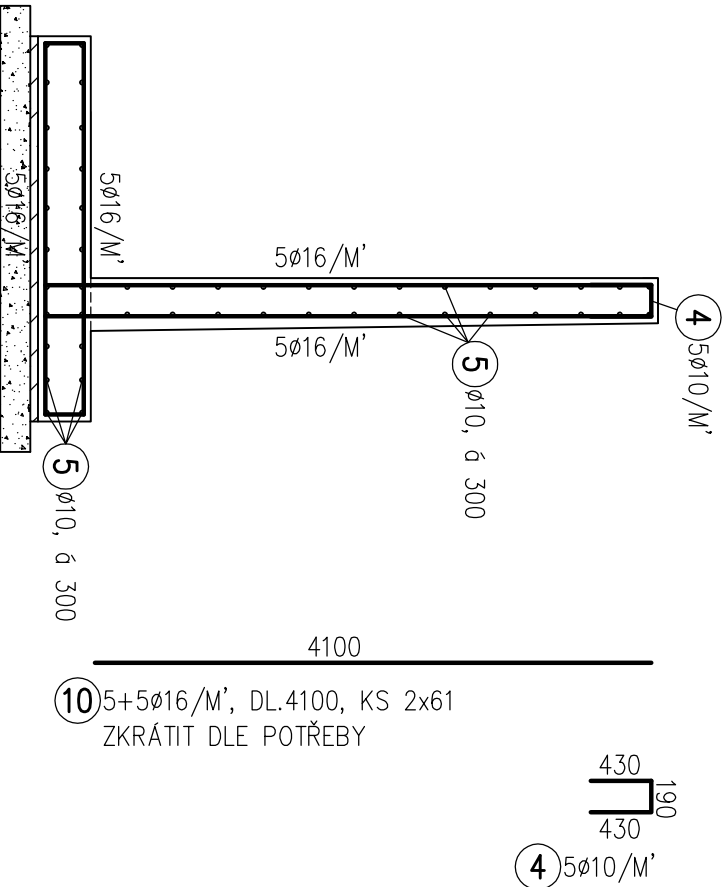

4 5ø10/M'


10 5+5ø16/M', DL.4100, KS 2x61 ZKRÁTIT DLE POTŘEBY

VÝZTUŽ ŘEZU 6-6 – 2 M’

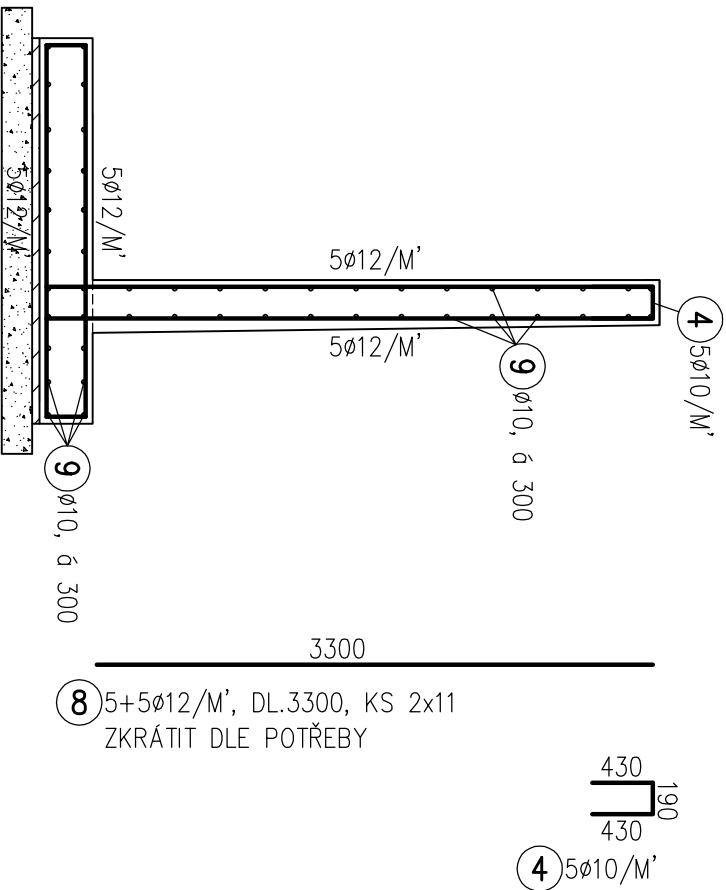


4 5ø10/M'

8 5+5ø12/M', DL.3300, KS 2x11 ZKRÁTIT DLE POTŘEBY

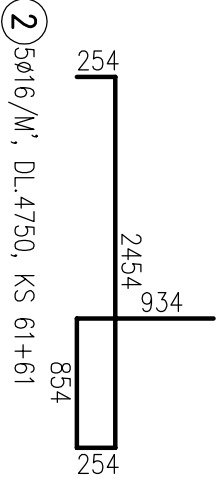


2 5ø16/M', DL.4750, KS 61+61




1 5ø16/M', DL.3000, KS 61+61

5 ø10, á 300, DL.11900, KS 48+50

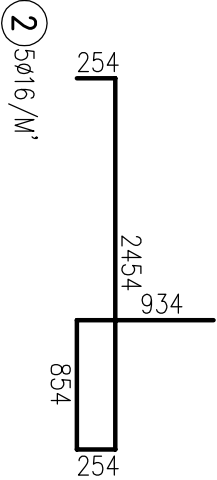

2 5ø16/M'



1 5ø16/M'

5 ø10, á 300

VÝPIS VÝZTUŽE					
OCEL BST500					
POL	PROFIL	DL.	KS	10	12
1	16	3.00	122		366.00
2	16	4.75	122		579.50
3	16	3.65	122		445.30
4	10	1.05	133	139.65	
5	10	11.90	98	1166.20	
6	12	3.00	11		33.00
7	12	4.75	11		52.25
8	12	3.30	22		72.60
9	10	1.90	48	91.20	
10	16	4.10	122		500.20
CELKOVÁ DÉLKA (M)			1397.05	157.85	1891.00
HMOTNOST 1m' (KG)			0.616	0.887	1.578
CELKOVÁ HMOTNOST (KG)			860.9	140.1	2983.1
SPOTŘEBA CELKEM (KG)					3985 KG

BETON C30/37 XC4, XF1
OCEL BST500
KRYTÍ 40 MM

VÝZTUŽ OPĚRNÉ STĚNY OZ 01
ŘEZ 4-4, ŘEZ 5-5, ŘEZ 6-6

Č.V. D1.2.3/8
M 1:50
DOSTAVBA MŠ ZA FONTÁNOU V PŘELOUČI