



VÝZTUŽ PRŮVLAKU P2.3

ŘEZ – 4,3 M’

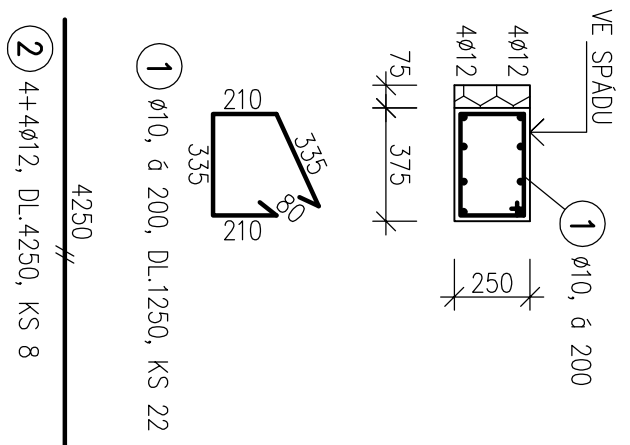


VÝZTUŽ PRŮVLAKU P2.4

ŘEZ – 3,75 M’

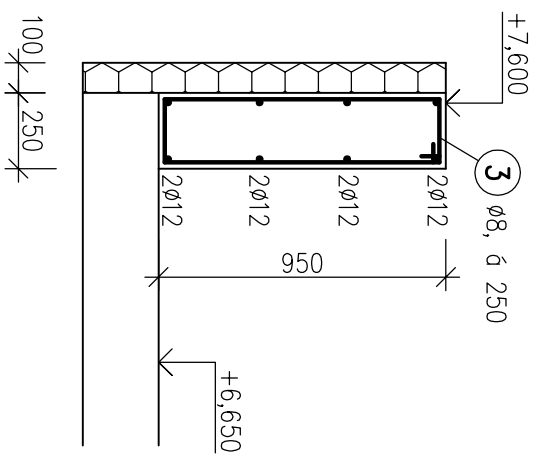


VÝZTUŽ PRŮVLAKU P2.5

ŘEZ – 4,25 M’

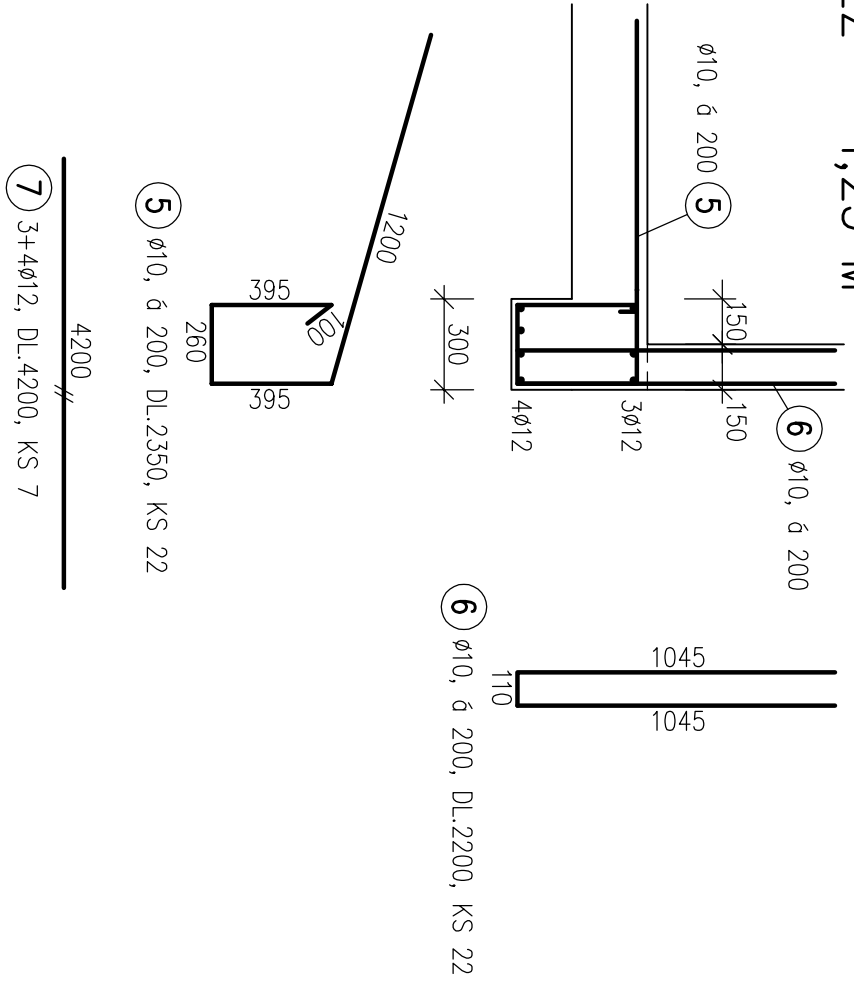

VÝZTUŽ PRŮVLAKU P2.6

ŘEZ – 2,05 M’

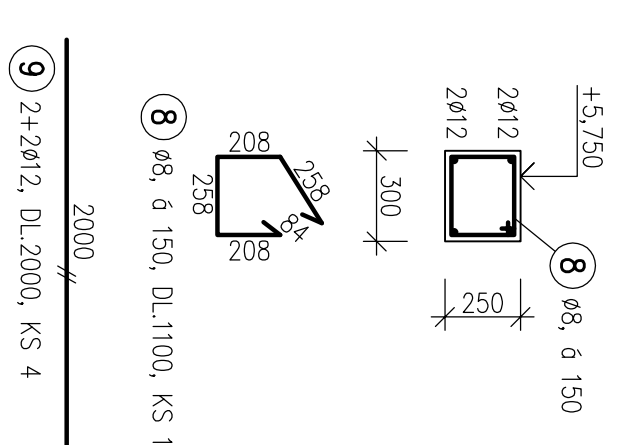

BETON C30/37 XC1  
OCEL BST500

VÝPIS VÝZTUŽE							
	OCEL BST500						
POL	PROFIL	DL.	KS	8	10	12	
1	10	1,25	22		27,50		
2	12	4,25	8			34,00	
3	8	2,40	15	36,00			
4	12	3,70	8			29,60	
5	10	2,35	22		51,70		
6	10	2,20	22		48,40		
7	12	4,20	7			29,40	
8	8	1,10	14	15,40			
9	12	2,00	4			8,00	
CELKOVÁ DÉLKA (M)				51,40	127,60	101,00	
HMOTNOST 1m' (KG)				0,394	0,616	0,887	
CELKOVÁ HMOTNOST (KG)				20,3	78,6	89,6	
SPOTŘEBA CELKEM (KG)						189 KG	