


# VÝZTUŽ MEZIPODESTY

## PODÉLNÝ ŘEZ

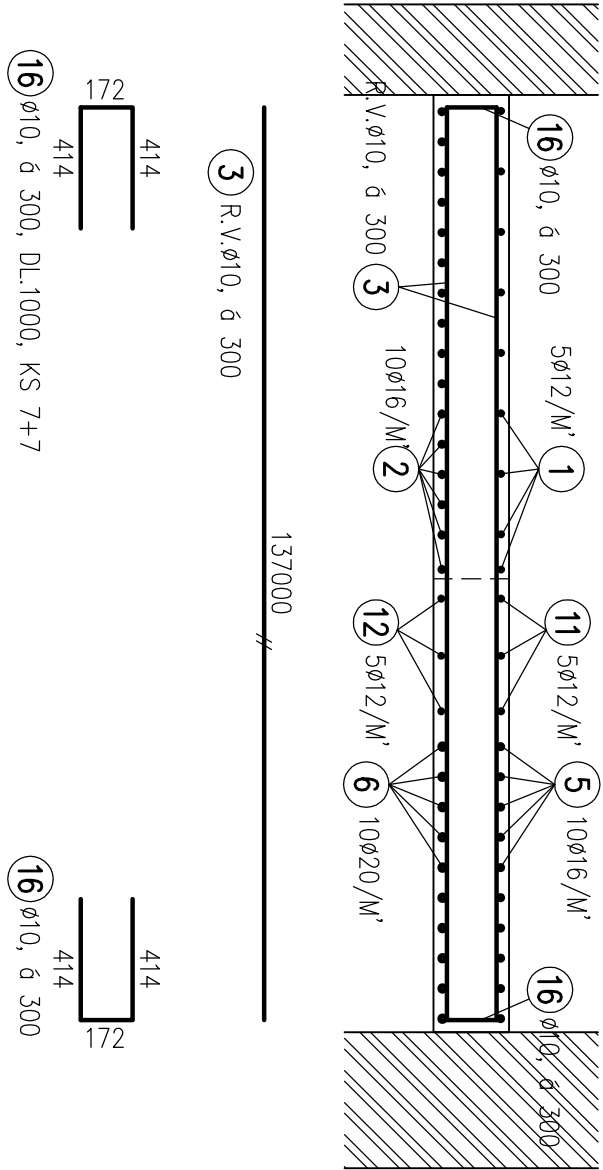

# BETON C30/37 XC1 XC1

## OCEL BST500

VÝPIS VÝZTUŽE								
OCEL BST500								
POL	PROFIL	DL.	KS	8	10	12	16	20
1	12	5,55	9			49,95		
2	16	7,00	16				112,00	
3	10	137,00	1		137,00			
4	10	0,75	46		34,50			
5	16	6,65	10				66,50	
6	20	5,90	10					59,00
7	12	3,10	10			31,00		
8	12	3,30	8			26,40		
9	8	1,55	17	26,35				
10	8	1,15	17	19,55				
11	12	2,80	3			8,40		
12	12	2,80	3			8,40		
13	12	1,40	19			26,60		
14	8	0,45	36	16,20				
15	8	0,30	40	12,00				
16	10	1,00	14		14,00			
CELKOVÁ DÉLKA (M)				74,10	185,50	150,75	178,50	59,00
HMOTNOST 1m <sup>1</sup> (KG)				0,394	0,616	0,887	1,578	2,465
CELKOVÁ HMOTNOST (KG)				29,2	114,3	133,8	281,6	145,4
SPOTŘEBA CELKEM (KG)								705 KG

# VÝZTUŽ MEZIPODESTY SCHODIŠTĚ

M 1:25  
Č.V. D1.2.9/6  
DOSTAVBA MŠ ZA FONTÁNOU V PŘELOUČI