



# VÝZTUŽ KVEŤNÍKU KV1 – 1 KS

## PŘÍČNÝ ŘEZ

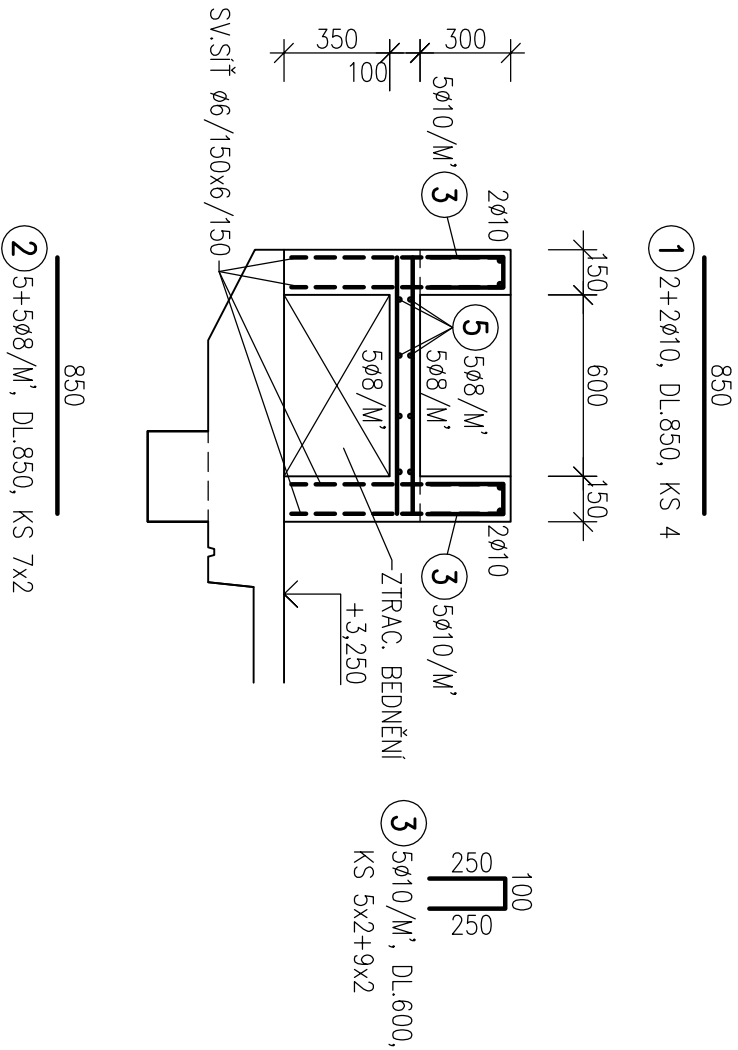

## PODÉLNÝ ŘEZ

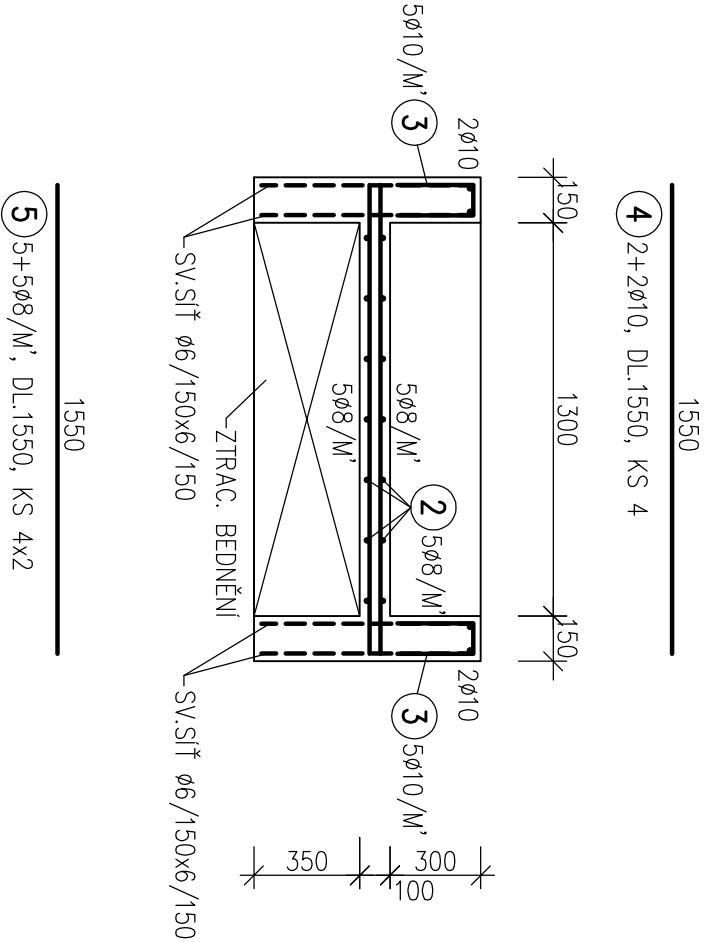

### SPONKY



BETON C30/37 XC1  
OCEL BST500  
KRYTÍ 20 MM

VÝPIS VÝZTUŽE								
OCEL BST500								
POL	PROFIL	DL.	KS	6	8	10		
1	10	0.85	4	0.00	0.00	3.40		
2	8	0.85	14	0.00	11.90	0.00		
3	10	0.60	28	0.00	0.00	16.80		
4	10	1.55	4	0.00	0.00	6.20		
5	8	1.55	8	0.00	12.40	0.00		
6	6	0.25	16	4.00	0.00	0.00		
CELKOVÁ DÉLKA (M)				4.00	24.30	26.40		
HMOTNOST 1m <sup>3</sup> (KG)				0.222	0.394	0.616		
CELKOVÁ HMOTNOST (KG)				0.9	9.6	16.3		
SPOTŘEBA CELKEM (KG)						27 kg		

SV.SÍŤ ø6/150x6/150 – 9 M2 – 28 KG

KVEŤNÍK KV1

M 1:25  
Č.V. D1.2.8/4  
DOSTAVBA MŠ ZA FONTÁNOU V PŘELOUČI