



BEČON C30/37 XC1  
OČEL BST500  
KRYTÍ 20 MM


VÝPIS VÝŽTUŽE				
OČEL BST500				
POL	PROFIL	DL.	KS	81214
1	14	7.90	126	995.40
2	14	8.95	65	581.75
3	12	4.10	81	332.10
4	12	2.60	6	15.60
5	8	2.95	43	126.85
6	8	5.25	16	84.00
7	12	6.25	11	68.75
8	12	1.50	16	24.00
9	12	1.95	3	5.85
10	12	9.10	112	1019.20
11	12	10.65	88	937.20
12	8	8.55	15	45.60
13	8	3.55	26	92.30
14	12	3.55	6	28.40
15	12	2.15	20	43.00
16	12	2.60	11	28.60
17	12	2.00	10	20.00
18	12	1.40	75	105.00
19	12	3.100	1	31.00
20	12	1.40	102	142.80
21	12	49.00	1	49.00
22	12	1.90	52	18.00
23	12	1.85	61	8.00
24	12	1.60	61	97.60
25	12	15.00	1	15.00
26	12	43.00	1	43.00
ČELKOVÁ DELKA (M)		431.40	3289.36	1577.15
HMOTNOST 1m² (KG)		0.394	0.887	1.208
CELKOVÁ HMOTNOST (KG)		170.1	2918.9	1904.9
SPOTŘEBA ČELKEM (KG)				4884 KG

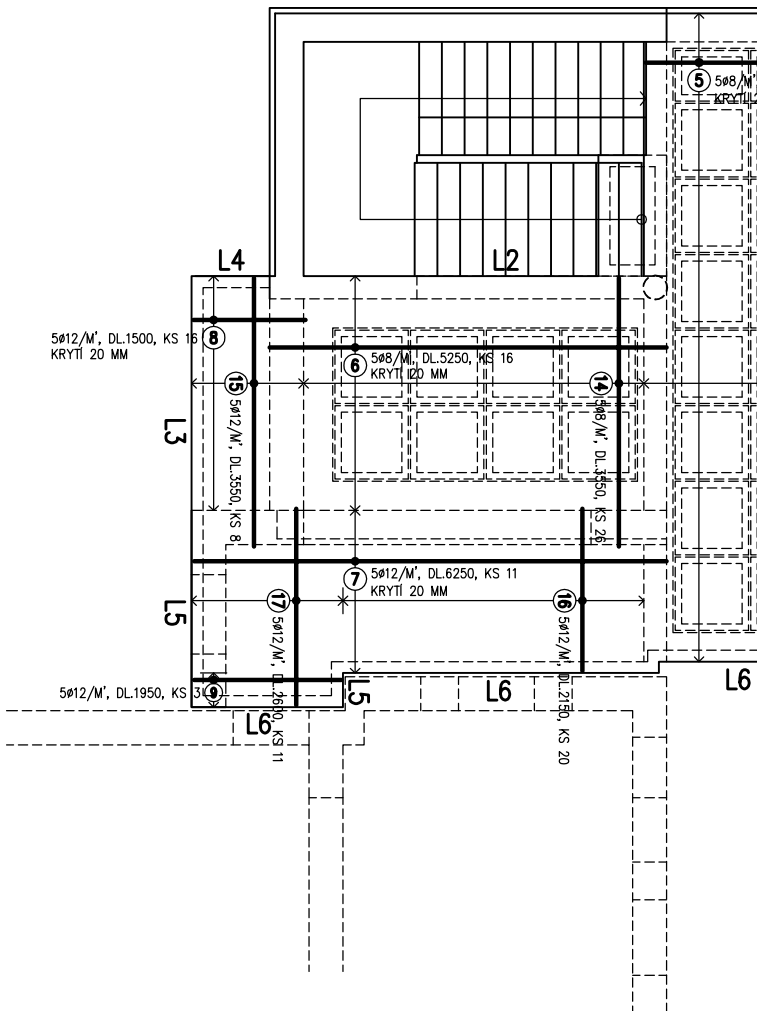


VÝŽTUŽ LEMU L1  
ŘEZ – 14,8 M'






VÝŽTUŽ LEMU L2  
ŘEZ – 20,2 M'




VÝŽTUŽ LEMU L3  
ŘEZ – 3,55 M'






VÝŽTUŽ LEMU L4  
ŘEZ – 1,5 M'



VÝŽTUŽ LEMU L5  
ŘEZ – 3,05 M'



VÝŽTUŽ LEMU L6  
ŘEZ – 8,8 M'



SPODNÍ VÝŽTUŽ DESKY STROPU 1.N.P.

M 1:100  
Č.V. DI.2.10/1  
DOSTAVBA MŠ ZA FONTÁNOU V PŘELOUČI